

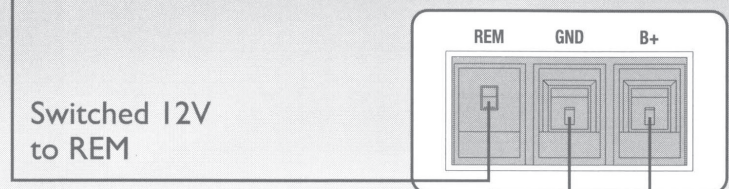
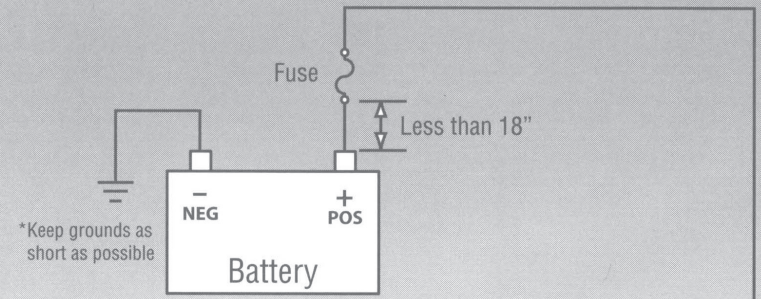
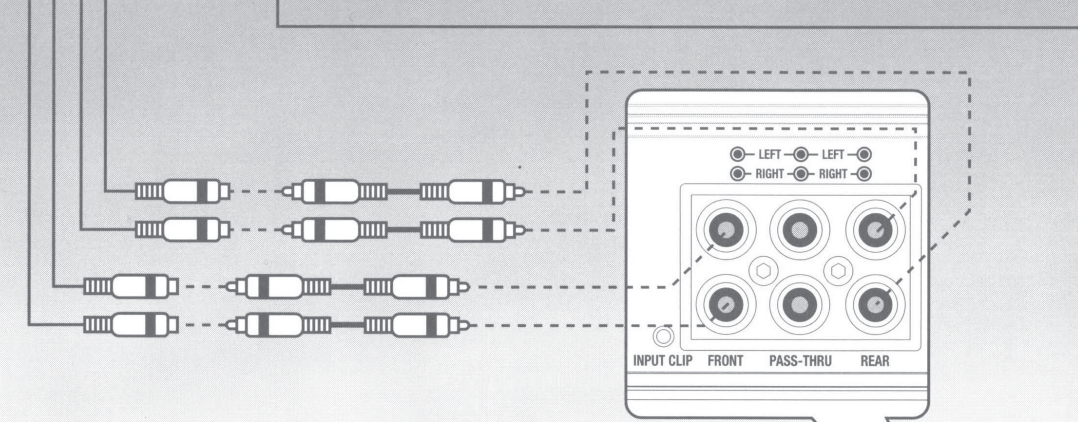
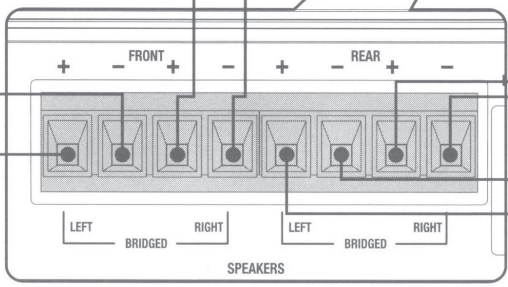



Source Unit



Connect to chassis ground of vehicle
*Keep grounds as short as possible

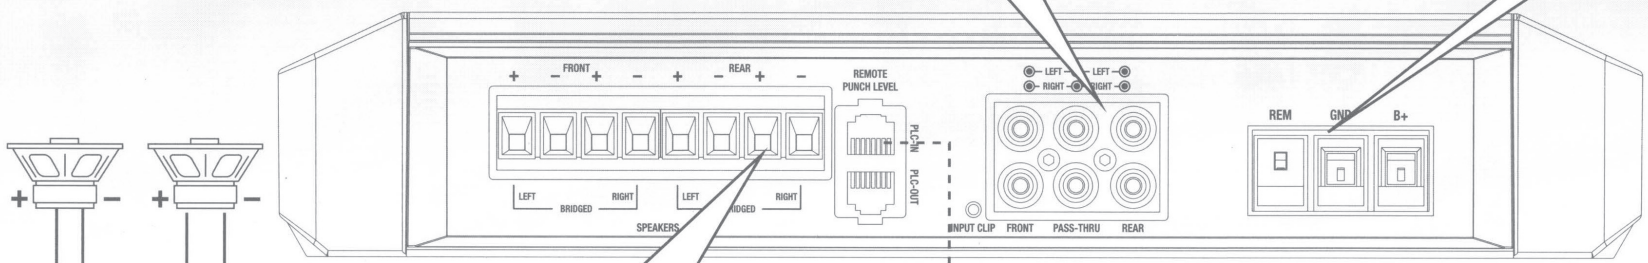

CAUTION
Be sure to connect speakers and Punch Level Control - PLC (if equipped) after amplifier output clip adjustment. (see reverse)



* Specifications subject to change without notice. Images depict typical setup. Refer to manual for additional wiring options.


Step 1 - Input

Input Clip Indicator Setup

Be sure to disconnect all speakers from the amplifier.


CAUTION

Failure to comply may cause damage to connected components and/or amplifier.




Step 2 - Input

Turn on the source unit with volume set to zero.

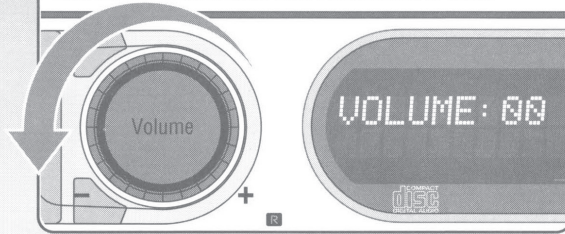


Step 3 - Input

Adjust the Bass & Treble levels on the source unit to flat.

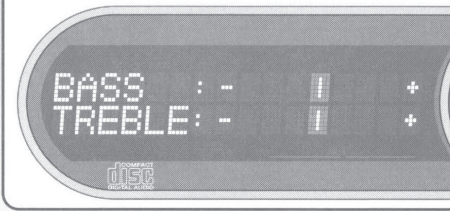


Step 4 - Input

Insert test tone or music CD to play for setup.

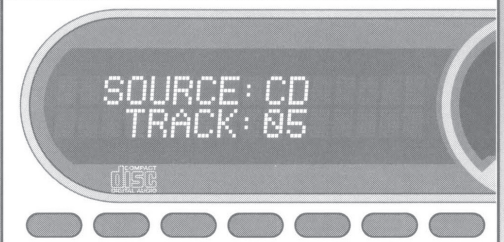

Note: Use the 40Hz @ 0dB tone (Track 5) for mono amplifier applications or the 1kHz @ 0dB tone (Track 7) for multi-channel amplifier applications. Be sure your x-over is switched to the appropriate filter setting.


Step 5 - Input

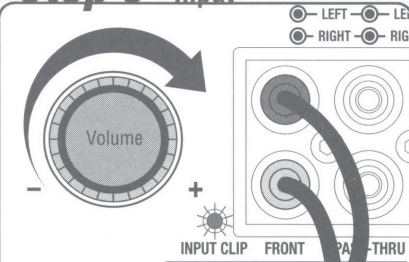

Increase the source unit volume until the Input Clip Indicator illuminates red.


Note: Input Clip can be viewed remotely with optional PLC2.

Step 6 - Input

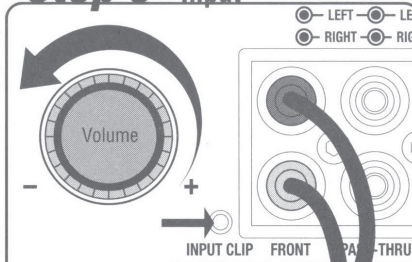

Decrease the source unit volume slightly until the light turns completely off. This establishes your maximum source unit volume for adjusting the Output Clip Indicator.

Note: Some source units will not clip.

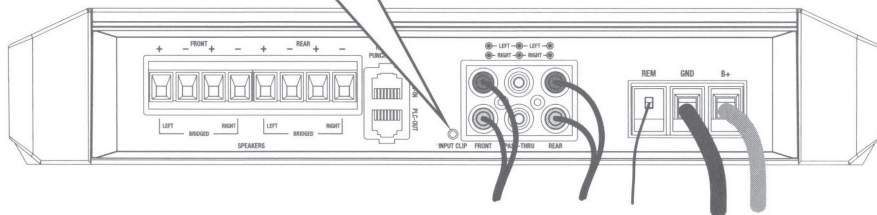

Step 7 - Output

Be sure to disconnect Punch Level Control - PLC (if equipped) from the amplifier.

Step 8 - Output

Output Clip Indicator Setup


OUTPUT CLIP INDICATORS		
MUSIC	TEST TONE	
BLUE	<input type="checkbox"/>	<input type="checkbox"/>
BLUE/RED	<input checked="" type="checkbox"/>	<input type="checkbox"/>
RED	<input type="checkbox"/>	<input checked="" type="checkbox"/>



Adjust the Input Level knob until the Output Clip Indicator illuminates to the appropriate color. Repeat for all channel levels of input.


Step 9 - Output

Turn the source unit volume down.



Step 10 - Output



Reconnect all speakers and Punch Level Control - PLC (if equipped) to the amplifier. Be sure to maintain proper speaker polarity.

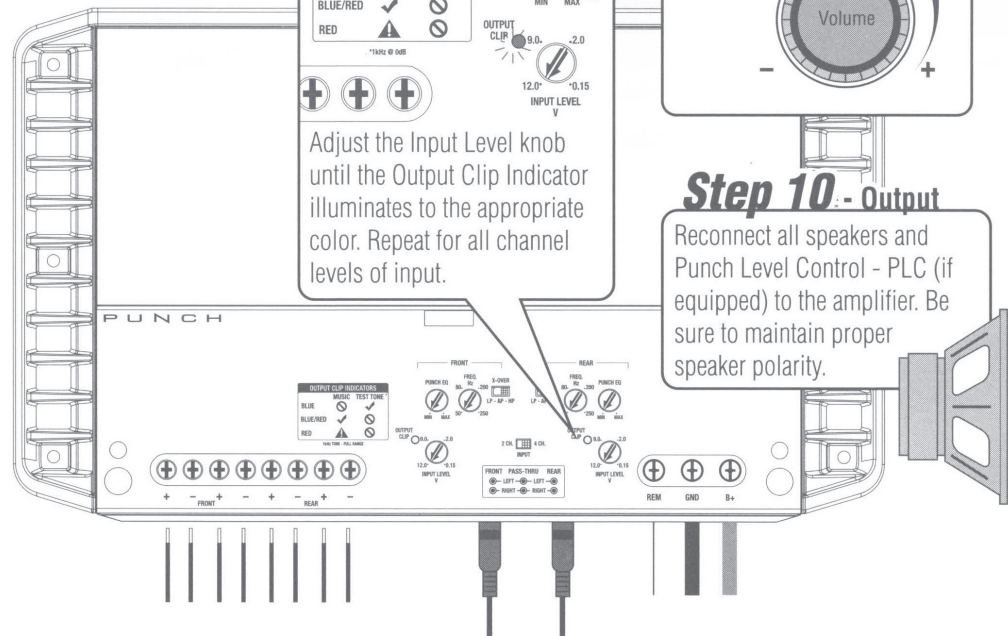



ELEMENT READY

Rockford's Element Ready product line takes into account the effects of the environment and takes measures to ensure lasting performance.

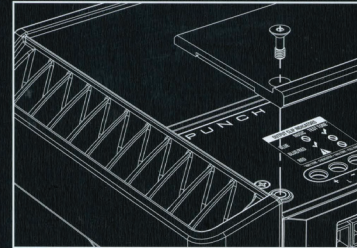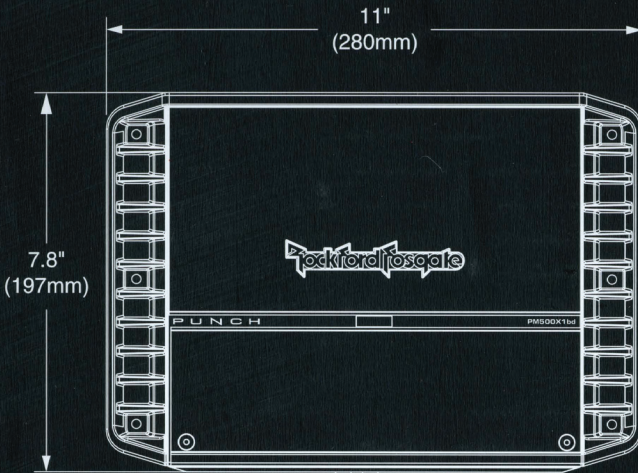

Stealth Top Mounted Control Panel

UV Inhibitor Materials





Dust Resistant



Corrosion Protection
- Conformal Coated PCB Boards



Stainless Hardware

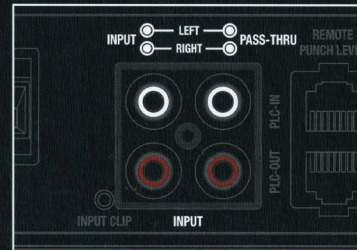
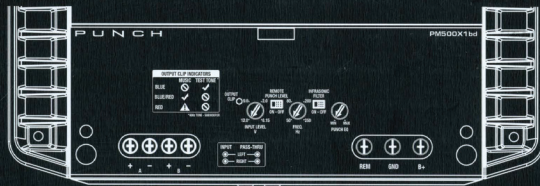


High Level Input Capable with Auto Turn On Circuit
(With Optional Accessory RF12SW)

PM500X1bd

500 Watt Mono Amplifier

- Rated Power: 150x1 @ 4 ohm, 300x1 @ 2 ohm, 500x1 @ 1 ohm
- Crossover: 12dB/Oct Butterworth
- Crossover Frequency: Variable 50Hz-250Hz LP
- Punch EQ: Punch EQ 0-18dB @ 45Hz
- Power Terminals: 4 AWG

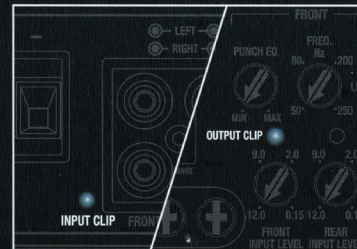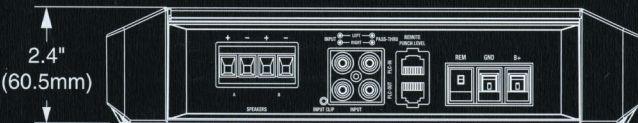

Input & Output Level Clip Indicators





Rockford Fosgate

FREE!
1 YEAR
EXTENDED
WARRANTY
 with purchase of a qualifying
Rockford Fosgate
Amplifier
Installation Kit
 1175-56999-02

Rockford Fosgate
 Designed and Engineered in Tempe, AZ, U.S.A.
 Made in Thailand
PM500X1bd
 Manufacture Date: 2015-03-16

PM500X1BD

 7 80667 34510 5

Rockford Fosgate Tempe, AZ, United States
 Made in Thailand



 2002/95/EC

©2014 Rockford Corporation. All Rights Reserved. ROCKFORD FOSGATE, PUNCH® and associated logos where applicable are registered trademarks of Rockford Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice.

1315-59343-01



SETUP DISC



rockfordfosgate.com • 800.669.9899

AUDIO TRACKS

1. 3Sixty Level Set
2. 3Sixty OEM Integration
3. Left/Right/Center Channel ID
4. Polarity Pulses
5. 40Hz / 0dB
6. 400Hz / 0dB
7. 1kHz / 0dB
8. 4kHz / 0dB
9. 40Hz / -5dB
10. 400Hz / -5dB

11. 1kHz / -5dB
12. 4kHz / -5dB
13. 40Hz / -10dB
14. 400Hz / -10dB
15. 1kHz / -10dB
16. 4kHz / -10dB
17. 40Hz / -15dB
18. 400Hz / -15dB
19. 1kHz / -15dB
20. 4kHz / -15dB

21. Slow Sine Sweep 20Hz – 200Hz
22. Slow Sine Sweep 200Hz – 2kHz
23. Slow Sine Sweep 2kHz – 20kHz
24. Log Swept Chirp
25. Uncorrelated Pink Noise
26. Correlated Pink Noise
27. All Bits High

CD-ROM CONTAINS:

Product Manual(s)

1600-58530-01



Rockford Fosgate Tempe, AZ, United States

©2013 Rockford Corporation. All Rights Reserved. ROCKFORD FOSGATE, PUNCH and associated logos where applicable are registered trademarks of Rockford Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice.

COMPACT
disc
DIGITAL DATA

SETUP DISC

1. 3Sixty Level Set
2. 3Sixty OEM Integration
3. Left/Right/Center Channel ID
4. Polarity Pulses
5. 40Hz / 0dB
6. 400Hz / 0dB
7. 1kHz / 0dB
8. 4kHz / 0dB
9. 40Hz / -5dB
10. 400Hz / -5dB
11. 1kHz / -5dB
12. 4kHz / -5dB
13. 40Hz / -10dB
14. 400Hz / -10dB

15. 1kHz / -10dB
16. 4kHz / -10dB
17. 40Hz / -15dB
18. 400Hz / -15dB
19. 1kHz / -15dB
20. 4kHz / -15dB
21. Slow Sine Sweep 20Hz–200Hz
22. Slow Sine Sweep 200Hz–2kHz
23. Slow Sine Sweep 2kHz–20kHz
24. Log Swept Chirp
25. Uncorrelated Pink Noise
26. Correlated Pink Noise
27. All Bits High

CD-ROM

Product Manual(s)

rockfordfosgate.com • 600 S. Rockford Drive • Tempe, AZ 85281 • 1-800-669-9899



Rockford Fosgate

COMPACT
disc
DIGITAL DATA

All trademarks are the property of their respective owners.

©2013 Rockford Corporation. All Rights Reserved.

CERTIFICATE OF PERFORMANCE VERIFICATION



Model #: **PM500X1BD** Serial #: XXXXXXXXXX Birth Date: **03/16/2015** Test System: **RF-RATS-4**

SYSTEM OPERATION	Idle Current Measure Current Draw at Idle				System Voltage Check System Reference Voltages			
	A PASS				V1 3.034 V2 5.004			
	Bias Set Output Channel Bias				High Rail Voltage Check Amplifier Rail Voltages			
	CH1 N/A CH2 N/A CH3 N/A CH4 N/A				V1 49.70 V2 N/A V3 N/A			
	DC Offset Check for No DC Voltage on Outputs				Low Rail Voltage Check Amplifier Rail Voltages			
CH1 .017 CH2 N/A CH3 N/A CH4 N/A CH5 N/A				V1 16.28 V2 -16.13				
Dark Current Current Draw < 100uA				Gain Tracking Check Gain Tracking Between Channels (dB)				
A PASS				CH1 N/A CH2 N/A CH3 N/A CH4 N/A				

SIGNAL	Frequency Response 20Hz-20kHz Sweep @ 1W RMS				High Pass Crossover Check 20Hz-20kHz Sweep @ 1W RMS			
	CH1 PASS CH2 N/A CH3 N/A CH4 N/A CH5 N/A				CH1 N/A CH2 N/A CH3 N/A CH4 N/A CH5 N/A			
	Remote Level & 2/4/5 Ch. Select Check 20Hz-20kHz Sweep @ 1W RMS				Low Pass Crossover & Punch EQ Check 20Hz-20kHz Sweep @ 1W RMS			
	CH1 PASS CH2 N/A CH3 N/A CH4 N/A CH5 N/A				CH1 PASS CH2 N/A CH3 N/A CH4 N/A CH5 N/A			
	Common Mode Rejection Rated 20Hz-20kHz Sweep @ 1W RMS				Channel Separation from Left to Right 20Hz-20kHz Sweep @ Rated RMS Power			
	CH1 PASS CH2 N/A CH3 N/A CH4 N/A CH5 N/A				CH1 N/A CH2 N/A CH3 N/A CH4 N/A CH5 N/A			
Signal to Noise Ratio 20Hz-20kHz Sweep @ Rated RMS Power				Total Harmonic Distortion 20Hz-20kHz Sweep @ 1W RMS (%)				
CH1 PASS CH2 N/A CH3 N/A CH4 N/A CH5 N/A				CH1 0.095 CH2 N/A CH3 N/A CH4 N/A CH5 N/A				
Input Sensitivity Check Sensitivity @ Minimum				Total Harmonic Distortion Rated (%) 20Hz-20kHz Sweep @ Rated RMS Power				
CH1 PASS CH2 N/A CH3 N/A CH4 N/A CH5 N/A				CH1 0.140 CH2 N/A CH3 N/A CH4 N/A CH5 N/A				

RELIABILITY	Short Protect Short All Channels Sequentially @ 1% THD				Thermal Test Thermistor Voltage Check			
	CH1 PASS CH2 N/A CH3 N/A CH4 N/A CH5 N/A				TH1 0.453 TH2 N/A TH3 N/A TH4 N/A TH5 N/A			
	Burn-In Amplifier Accelerated Life Monitor (45 sec. @ 1% THD)							
CH PASS TH PASS V PASS BIAS N/A IR PASS								

POWER	Channel Power Individual Channel Power @ 1% THD @ 1 Ω				Total Power Total RMS Power @ 1% THD <h2 style="font-size: 2em; margin: 0;">789 watts</h2>			
	CH1 789 CH2 N/A CH3 N/A CH4 N/A CH5 N/A							
	Total Power Total RMS Power @ Each Impedance @ 1% THD							
4Ω 300 2Ω 511 1Ω 789 2/1Ω N/A								

ALL Rockford Fosgate amplifiers are designed, developed, manufactured and tested in accordance with the CEA-2006 amplifier rating requirements. All tests conducted at 14.4Vdc, Min. Impedance, 1kHz(ab/ad) or 100Hz (bd) unless otherwise stated.
 ©2012 Rockford Corporation. All Rights Reserved. ROCKFORD FOSGATE, and associated logos where applicable are registered trademarks of Rockford Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice.





Are You Engineered to Rock?

Get a One-Year Extended Warranty when you use a matching Rockford Fosgate Amplifier Installation kit with your Amplifier!

We want you to get the performance and reliability that made Rockford Fosgate Amplifiers famous. Using poor-quality under-spec wiring is a guaranteed way to get less than you paid for from your system.

We are so certain that getting your system wired to rock with the right wire and cables will make a difference, that we will give you an additional 1 year warranty on your amp when you use the matching amplifier installation kit. See your dealer to determine the matching kit for your amplifier.

To extend your warranty under this program attach the serial number sticker or UPC code removed from the original amplifier installation kit package in the box below. Keep this form along with your original purchase receipt.

One warranty extension per amplifier regardless of the number of amplifier kits purchased. Amplifier and wiring kit must be purchased at the same time.

What is Covered

This warranty applies only to Rockford Fosgate products sold to consumers by Authorized Rockford Fosgate Dealers in the United States of America or its possessions. Product purchased by consumers from an Authorized Rockford Fosgate Dealer in another country are covered only by that country's Distributor and not by Rockford Corporation.

Who is Covered

This warranty covers only the original purchaser of Rockford product purchased from an Authorized Rockford Fosgate Dealer in the United States. In order to receive service, the purchaser must provide Rockford with a copy of the receipt stating the customer name, dealer name, product purchased and date of purchase. Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at Rockford's discretion.

What is Not Covered

1. Damage caused by accident, abuse, improper operations, water, theft, shipping
2. Any cost or expense related to the removal or reinstallation of product
3. Service performed by anyone other than Rockford or an Authorized Rockford Fosgate Service Center
4. Any product which has had the serial number defaced, altered, or removed
5. Subsequent damage to other components
6. Any product purchased outside the U.S.
7. Any product not purchased from an Authorized Rockford Fosgate Dealer

Limit on Implied Warranties

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for Rockford Fosgate any other liability in connection with the sale of the product.

How to Obtain Service Under the Extended Warranty Program

The amplifier must be returned by the customer (you) or an authorized Rockford Fosgate retailer with a copy of the original receipt and the ORIGINAL Performance Verification Certificate with the serial number or UPC code from the amp installation kit. Contact your Authorized Rockford Fosgate Dealer or our Customer Support Specialists (1-800-669-9899) for assistance.

EU Warranty

This product meets the current EU warranty requirements, see your Authorized dealer for details.

"This Additional One-Year Warranty" is only available where allowed under local laws.

Attach Amplifier Installation Kit
Serial Number or UPC Code from
original packaging here.