




Source Unit

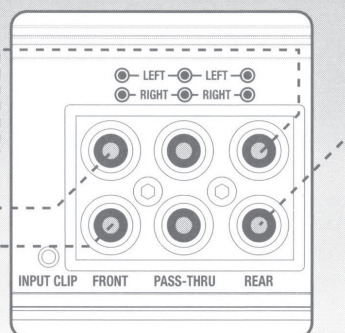

*Keep grounds as short as possible





Switched 12V to REM




Connect to chassis ground of vehicle

*Keep grounds as short as possible

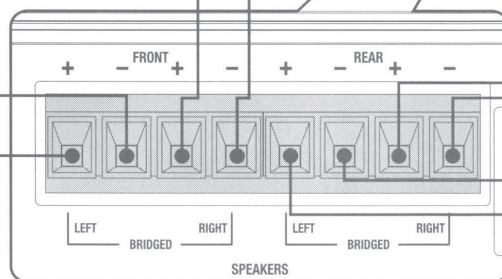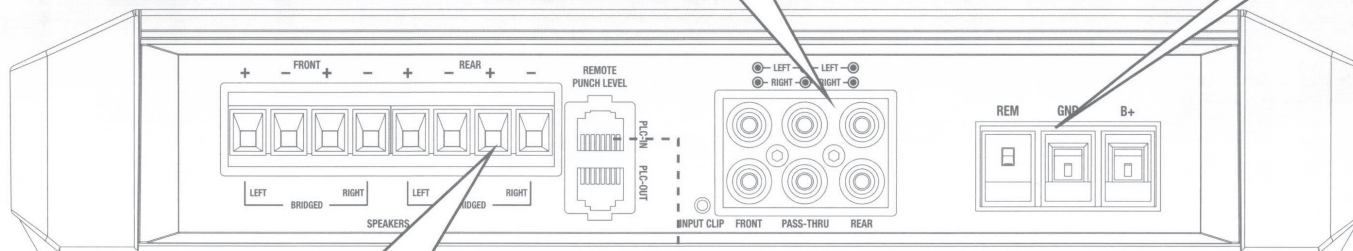

CAUTION
Be sure to connect speakers and Punch Level Control - PLC (if equipped) after amplifier output clip adjustment. (see reverse)

Optional Accessory
PLC2




Step 1 - Input

Input Clip Indicator Setup

Be sure to disconnect all speakers from the amplifier.


CAUTION

Failure to comply may cause damage to connected components and/or amplifier.




Step 2 - Input

Turn on the source unit with volume set to zero.

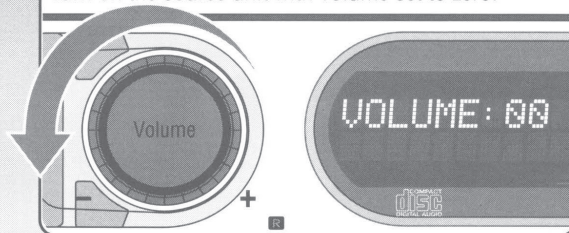

Step 3 - Input

Adjust the Bass & Treble levels on the source unit to flat.

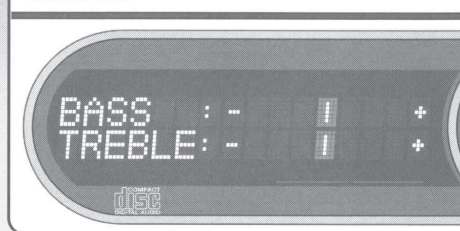

Amplifier Clip Indicator Setup


Step 4 - Input

Insert test tone or music CD to play for setup.



Note: Use the 40Hz @ 0dB tone (Track 5) for mono amplifier applications or the 1kHz @ 0dB tone (Track 7) for multi-channel amplifier applications. Be sure your x-over is switched to the appropriate filter setting.


Step 5 - Input

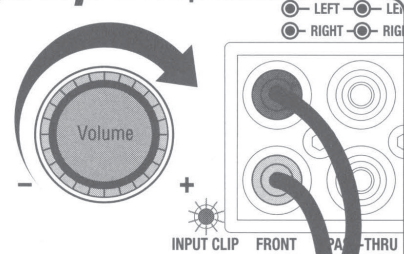

Increase the source unit volume until the Input Clip Indicator illuminates red.


Note: Input Clip can be viewed remotely with optional PLC2.

Step 6 - Input

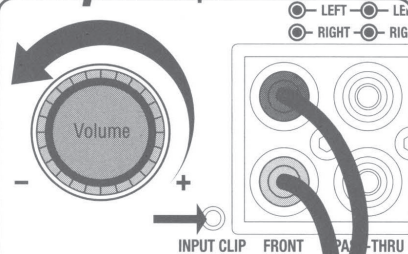

Decrease the source unit volume slightly until the light turns completely off. This establishes your maximum source unit volume for adjusting the Output Clip Indicator.

Note: Some source units will not clip.

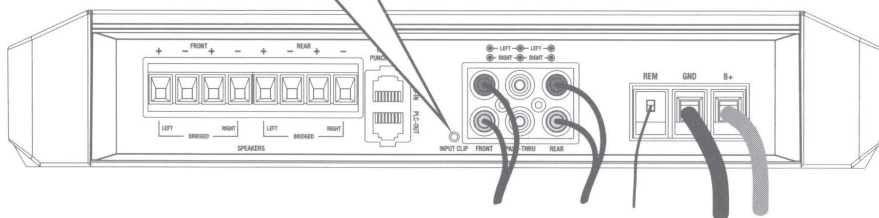

Step 7 - Output

Be sure to disconnect Punch Level Control - PLC (if equipped) from the amplifier.

Step 8 - Output


Output Clip Indicator Setup

OUTPUT CLIP INDICATORS	MUSIC	TEST TONE
BLUE	✓	✓
BLUE/RED	✓	✓
RED	✗	✗

Adjust the Input Level knob until the Output Clip Indicator illuminates to the appropriate color. Repeat for all channel levels of input.


Step 9 - Output

Turn the source unit volume down.



Step 10 - Output

Reconnect all speakers and Punch Level Control - PLC (if equipped) to the amplifier. Be sure to maintain proper speaker polarity.

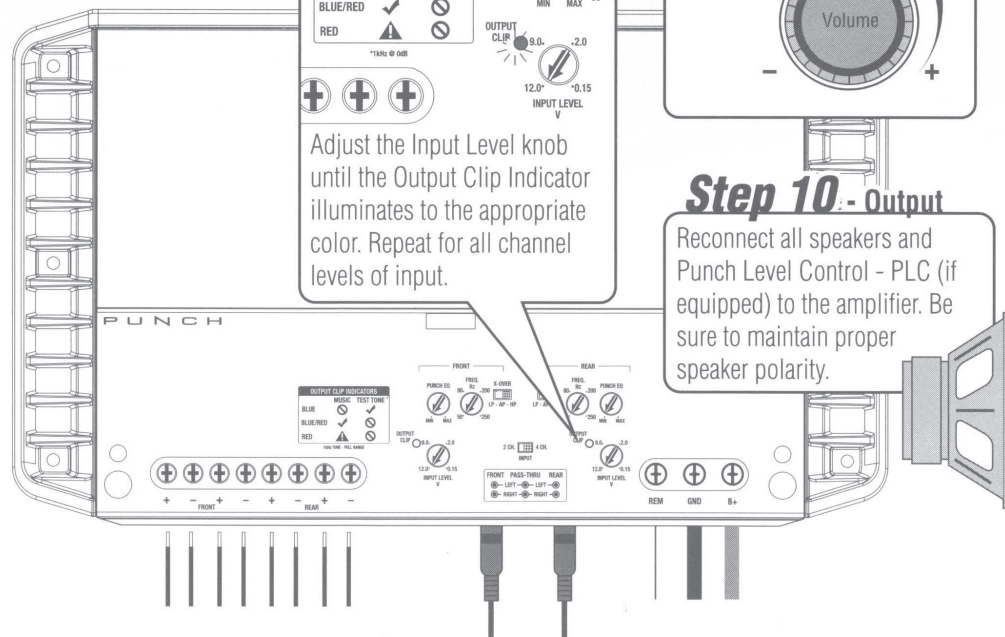

ELEMENT READY

Rockford's Element Ready product line takes into account the effects of the environment and takes measures to ensure lasting performance.

UV Inhibitor Materials



Dust Resistant



Corrosion Protection

- Conformal Coated PCB Boards





Stainless Hardware

PM600X4



600 Watt Multi-Channel Amplifier

- Rated Power:
75x4 @ 4 ohm, 150x4 @ 2 ohm, 300x2 @ 4 ohm/Bridged
- Crossover: 12dB/Oct Butterworth
- Crossover Frequency: Variable 50Hz-250Hz HP/AP/LP
- Punch EQ: 0-14dB @ 12.5kHz and 0-18dB @ 45Hz
- Power Terminals: 4 AWG





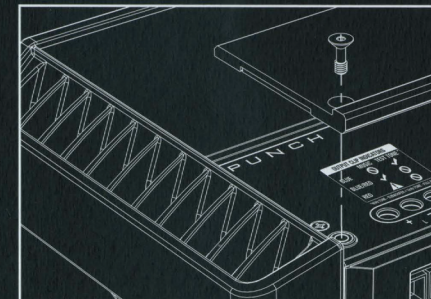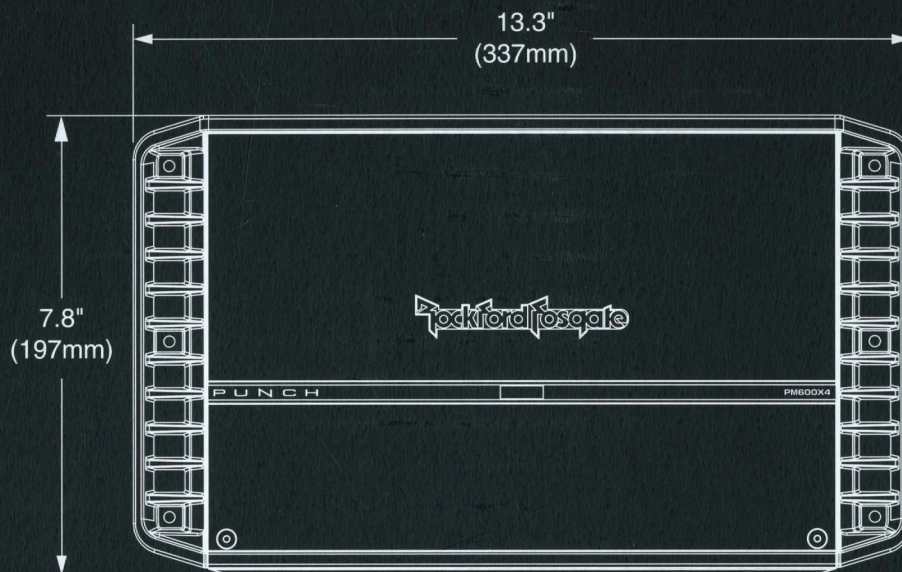

Stealth Top Mounted Control Panel

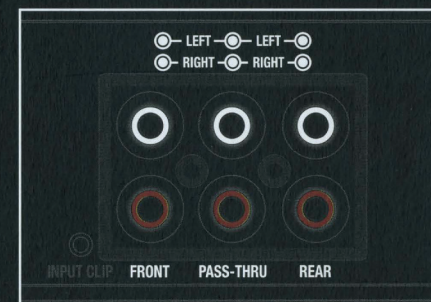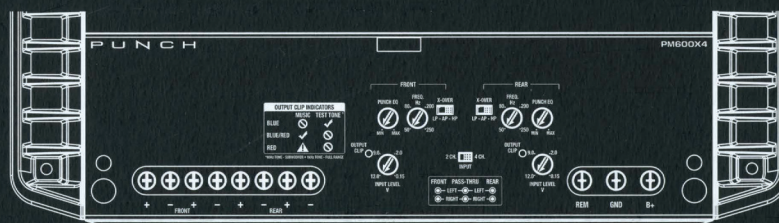

High Level Input Capable with
Auto Turn On Circuit
(With Optional Accessory RF12SW)

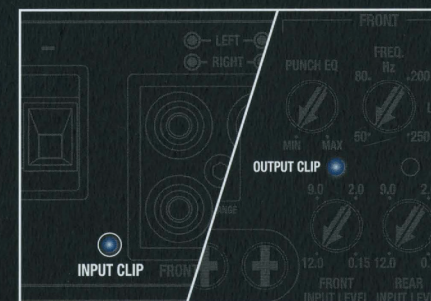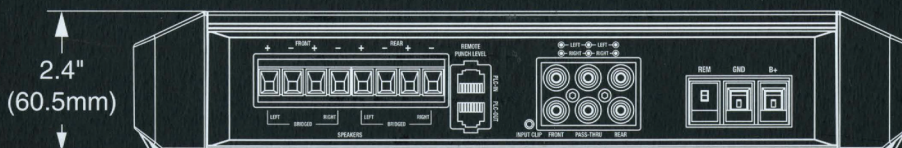

Input & Output Level Clip Indicators



Rockford Fosgate®

Rockford Fosgate®

Designed and Engineered in Tempe, AZ, U.S.A.
Made In Thailand

PM600X4

Manufacture Date: 2015-02-26

PM600X4

Rockford Fosgate Tempe, AZ, United States
Made in Thailand



©2014 Rockford Corporation. All Rights Reserved. ROCKFORD FOSGATE, PUNCH® and associated logos where applicable are registered trademarks of Rockford Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice.

1315-59345-01

FREE!
1 YEAR
EXTENDED
WARRANTY
with purchase of a qualifying

Rockford Fosgate®

**Amplifier
Installation Kit**

1175-56999-02



SETUP DISC



Rockford Fosgate

rockfordfosgate.com • 800.669.9899

AUDIO TRACKS

1. 3Sixty Level Set
2. 3Sixty OEM Integration
3. Left/Right/Center Channel ID
4. Polarity Pulses
5. 40Hz / 0dB
6. 400Hz / 0dB
7. 1kHz / 0dB
8. 4kHz / 0dB
9. 40Hz / -5dB
10. 400Hz / -5dB
11. 1kHz / -5dB
12. 4kHz / -5dB
13. 40Hz / -10dB
14. 400Hz / -10dB
15. 1kHz / -10dB
16. 4kHz / -10dB
17. 40Hz / -15dB
18. 400Hz / -15dB
19. 1kHz / -15dB
20. 4kHz / -15dB
21. Slow Sine Sweep 20Hz – 200Hz
22. Slow Sine Sweep 200Hz – 2kHz
23. Slow Sine Sweep 2kHz – 20kHz
24. Log Swept Chirp
25. Uncorrelated Pink Noise
26. Correlated Pink Noise
27. All Bits High

CD-ROM CONTAINS:

Product Manual(s)

1600-58530-01

Rockford Fosgate Tempe, AZ, United States

©2013 Rockford Corporation. All Rights Reserved. ROCKFORD FOSGATE, PUNCH and associated logos where applicable are registered trademarks of Rockford Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice.

COMPACT
disc
DIGITAL DATA



SETUP DISC

1. 3Sixty Level Set
2. 3Sixty OEM Integration
3. Left/Right/Center
Channel ID
4. Polarity Pulses
5. 40Hz / 0dB
6. 400Hz / 0dB
7. 1kHz / 0dB
8. 4kHz / 0dB
9. 40Hz / -5dB
10. 400Hz / -5dB
11. 1kHz / -5dB
12. 4kHz / -5dB
13. 40Hz / -10dB
14. 400Hz / -10dB

15. 1kHz / -10dB
16. 4kHz / -10dB
17. 40Hz / -15dB
18. 400Hz / -15dB
19. 1kHz / -15dB
20. 4kHz / -15dB
21. Slow Sine Sweep 20Hz–200Hz
22. Slow Sine Sweep 200Hz–2kHz
23. Slow Sine Sweep 2kHz–20kHz
24. Log Swept Chirp
25. Uncorrelated Pink Noise
26. Correlated Pink Noise
27. All Bits High

CD-ROM

Product Manual(s)



Rockford Fosgate

COMPACT
disc
DIGITAL DATA

rockfordfosgate.com • 600 S. Rockford Drive • Tempe, AZ 85281 • 1-800-669-9899

©2013 Rockford Corporation. All Rights Reserved. All trademarks are the property of their respective owners.

CERTIFICATE OF PERFORMANCE VERIFICATION



Model #: **PM600X4** Serial #: **[REDACTED]** Birth Date: **02/26/2015** Test System: **RF-RATS-4**

SYSTEM OPERATION

Idle Current Measure Current Draw at Idle					System Voltage Check System Reference Voltages								
A	PASS				V1	3.878	V2	4.996					
Bias Set Output Channel Bias					High Rail Voltage Check Amplifier Rail Voltages								
CH1	PASS	CH2	PASS	CH3	PASS	CH4	PASS						
V1	35.61	V2	-35.64	V3	N/A								
DC Offset Check for No DC Voltage on Outputs					Low Rail Voltage Check Amplifier Rail Voltages								
CH1	.004	CH2	-.006	CH3	-.001	CH4	-.010	CH5	N/A				
V1	16.80	V2	-16.21										
Dark Current Current Draw < 100uA					Gain Tracking Check Gain Tracking Between Channels (dB)								
A	PASS				CH1	0.124	CH2	0.124	CH3	0.217	CH4	0.217	

SIGNAL	Frequency Response 20Hz-20kHz Sweep @ 1W RMS					High Pass Crossover Check 20Hz-20kHz Sweep @ 1W RMS				
	CH1	PASS	CH2	PASS	CH3	PASS	CH4	PASS	CH5	N/A
	Remote Level & 2/4/5 Ch. Select Check 20Hz-20kHz Sweep @ 1W RMS					Low Pass Crossover & Punch EQ Check 20Hz-20kHz Sweep @ 1W RMS				
	CH1	N/A	CH2	N/A	CH3	PASS	CH4	PASS	CH5	N/A
	CH1	PASS	CH2	PASS	CH3	PASS	CH4	PASS	CH5	N/A
SIGNAL	Common Mode Rejection Rated 20Hz-20kHz Sweep @ 1W RMS					Channel Separation from Left to Right 20Hz-20kHz Sweep @ Rated RMS Power				
	CH1	PASS	CH2	PASS	CH3	PASS	CH4	PASS	CH5	N/A
	Signal to Noise Ratio 20Hz-20kHz Sweep @ Rated RMS Power					Total Harmonic Distortion 20Hz-20kHz Sweep @ 1W RMS (%)				
	CH1	PASS	CH2	PASS	CH3	PASS	CH4	PASS	CH5	N/A
	CH1	0.062	CH2	0.061	CH3	0.073	CH4	0.076	CH5	N/A
SIGNAL	Input Sensitivity Check Sensitivity @ Minimum					Total Harmonic Distortion Rated (%) 20Hz-20kHz Sweep @ Rated RMS Power				
	CH1	PASS	CH2	PASS	CH3	PASS	CH4	PASS	CH5	N/A
	CH1	0.011	CH2	0.010	CH3	0.015	CH4	0.044	CH5	N/A

RELIABILITY	Short Protect Short All Channels Sequentially @ 1% THD					Thermal Test Thermistor Voltage Check				
	CH1	PASS	CH2	PASS	CH3	PASS	CH4	PASS	CH5	N/A
	TH1	1.496	TH2	1.600	TH3	N/A	TH4	N/A	TH5	N/A
RELIABILITY	Burn-In Amplifier Accelerated Life Monitor (45 sec. @ 1% THD)									
	CH	PASS	TH	PASS	V	PASS	BIAS	PASS	IR	PASS

POWER	Channel Power						@2 Ω	Total Power		
	Individual Channel Power @ 1% THD							Total RMS Power @ 1% THD		
	CH1	214	CH2	214	CH3	215	CH4	215	CH5	N/A
	Total Power						857 watts			
	Total RMS Power @ Each Impedance @ 1% THD									
4Ω	525	2Ω	857	1Ω	N/A	2/1Ω	N/A			

ALL Rockford Fosgate amplifiers are designed, developed, manufactured and tested in accordance with the CEA-2006 amplifier rating requirements. All tests conducted at 14.4Vdc, Min. Impedance, 1kHz(ab/ad) or 100Hz (bd) unless otherwise stated.
©2012 Rockford Corporation. All Rights Reserved. ROCKFORD FOSGATE, and associated logos where applicable are registered trademarks of Rockford Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners. Specifications subject to change without notice.





Are You Engineered to Rock?

Get a One-Year Extended Warranty when you use a matching Rockford Fosgate Amplifier Installation kit with your Amplifier!

We want you to get the performance and reliability that made Rockford Fosgate Amplifiers famous. Using poor-quality under-spec wiring is a guaranteed way to get less than you paid for from your system.

We are so certain that getting your system wired to rock with the right wire and cables will make a difference, that we will give you an additional 1 year warranty on your amp when you use the matching amplifier installation kit. See your dealer to determine the matching kit for your amplifier.

To extend your warranty under this program attach the serial number sticker or UPC code removed from the original amplifier installation kit package in the box below. Keep this form along with your original purchase receipt.

One warranty extension per amplifier regardless of the number of amplifier kits purchased. Amplifier and wiring kit must be purchased at the same time.

What is Covered

This warranty applies only to Rockford Fosgate products sold to consumers by Authorized Rockford Fosgate Dealers in the United States of America or its possessions. Product purchased by consumers from an Authorized Rockford Fosgate Dealer in another country are covered only by that country's Distributor and not by Rockford Corporation.

Who is Covered

This warranty covers only the original purchaser of Rockford product purchased from an Authorized Rockford Fosgate Dealer in the United States. In order to receive service, the purchaser must provide Rockford with a copy of the receipt stating the customer name, dealer name, product purchased and date of purchase. Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at Rockford's discretion.

What is Not Covered

1. Damage caused by accident, abuse, improper operations, water, theft, shipping
2. Any cost or expense related to the removal or reinstallation of product
3. Service performed by anyone other than Rockford or an Authorized Rockford Fosgate Service Center
4. Any product which has had the serial number defaced, altered, or removed
5. Subsequent damage to other components
6. Any product purchased outside the U.S.
7. Any product not purchased from an Authorized Rockford Fosgate Dealer

Limit on Implied Warranties

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for Rockford Fosgate any other liability in connection with the sale of the product.

How to Obtain Service Under the Extended Warranty Program

The amplifier must be returned by the customer (you) or an authorized Rockford Fosgate retailer with a copy of the original receipt and the ORIGINAL Performance Verification Certificate with the serial number or UPC code from the amp installation kit. Contact your Authorized Rockford Fosgate Dealer or our Customer Support Specialists (1-800-669-9899) for assistance.

EU Warranty

This product meets the current EU warranty requirements, see your Authorized dealer for details.
"This Additional One-Year Warranty" is only available where allowed under local laws.

Attach Amplifier Installation Kit
Serial Number or UPC Code from
original packaging here.