




7512-44

1500W Peak Power Subwoofer

Parameters



Los parámetros, Paramètres, Parameter

Fs: 32 Hz
Qms: 4.34
Cms: 0.109 mm/N
Mms: 222 g
Rms: 10.81 kg/s
Vas: 1.727 ft³ (48.89 liters)
Xmax: 0.66 in (16.7 mm)
D: 10.53 in (267.5 mm)
Sd: 87.11 in² (562 cm²)
Vd: 57.49 in³ (0.942 liters)
Qes: 0.764
Re: 1.65 Ω
Bl: 9.82 Tm
Prms: 750 Watts
Qts: 0.649
n0: 0.206%
SPLo: 85.34 dB
SPL 2.83V/1m: 92.19 dB

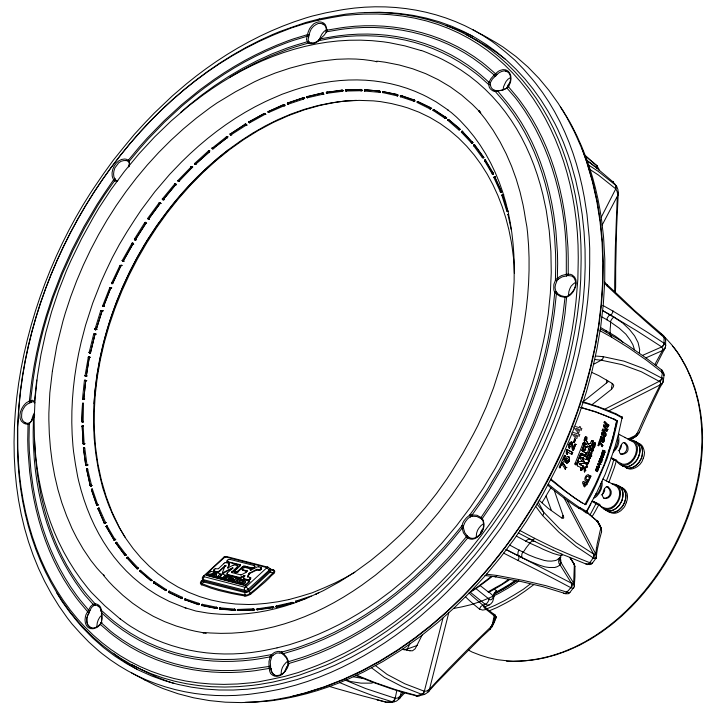

Specifications

Las especificaciones, Specifications, Spezifikationen

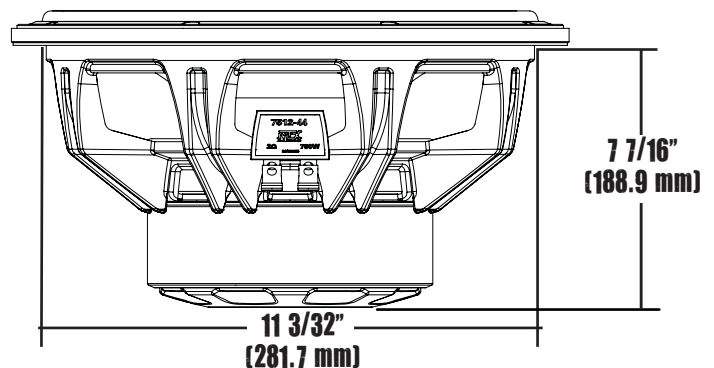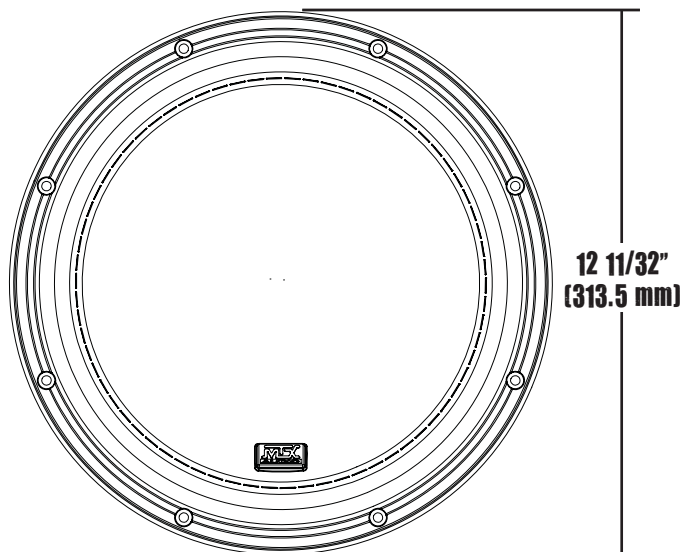

Recommended Power Rating of 375 - 750 Watts RMS

La Potencia nominal recomendada, Le Pouvoir recommandé Evaluant, Empfohlene Kraft Einzuschätze

7512-44 Recommended Enclosures



For the best possible sound quality where space is a premium, MTX recommends using a sealed enclosure. For excellent sound quality with increased output compared to sealed enclosures (3dB or more), MTX recommends using a vented enclosure. All recommended enclosures have been designed and thoroughly tested by MTX.



For additional enclosure designs check the MTX website, the barcode will take you to the box design page.

Sealed Enclosure



El Cerco sellado, Cloture scellée, Abgedichtete Einschließung

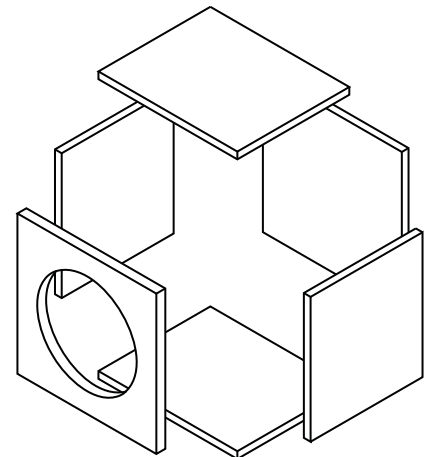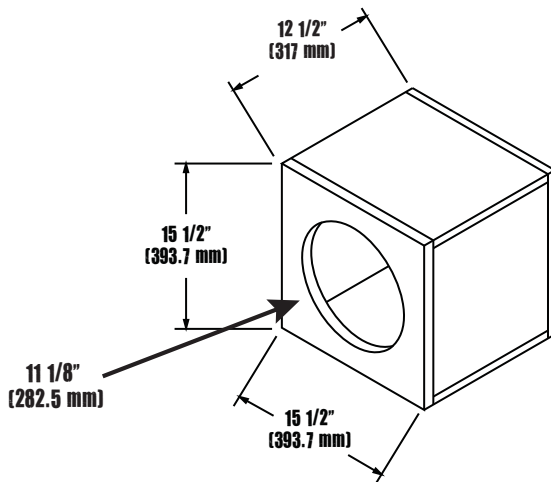

Net Internal Volume: 1.25 ft³

Vented Enclosure

Descargar Cerco, Cloture d'aération, Vented Einschließung

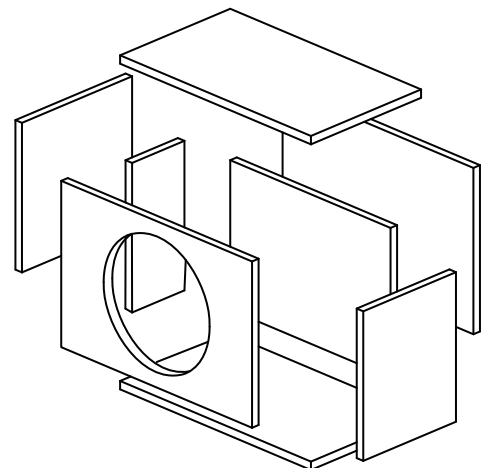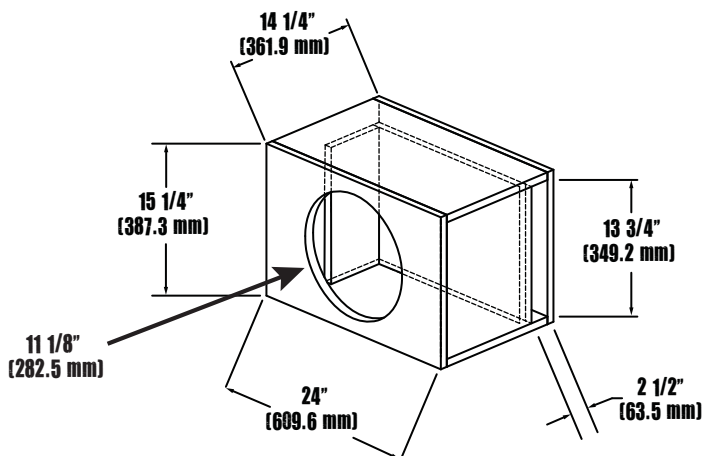

Net Internal Volume: 2.32 ft³
Port length: 27"