


16/6 Wiring Instructions

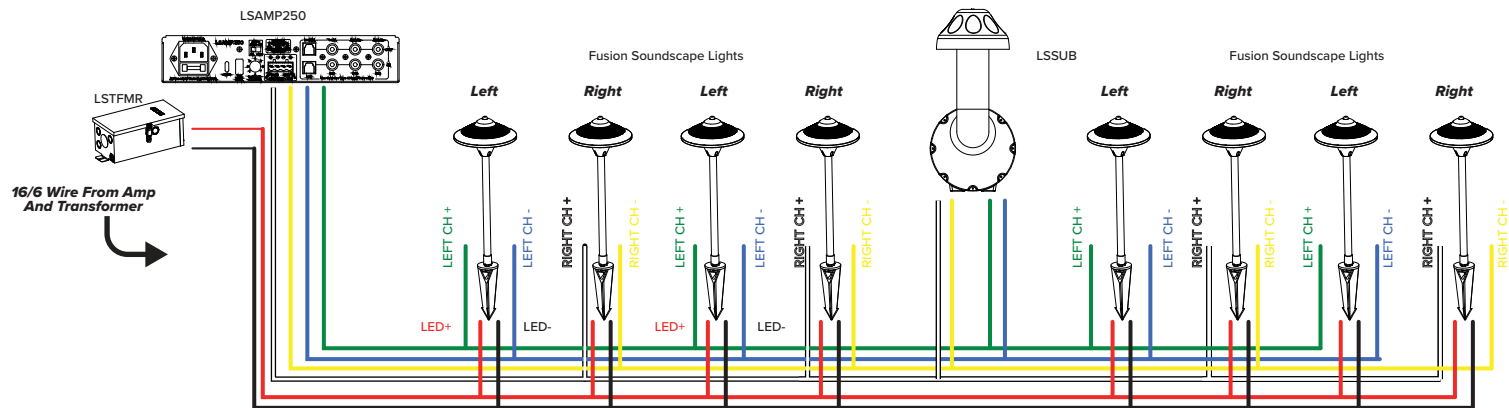

Speaker and Subwoofer Wiring Instructions

Using 16/6 wire note which wire color will correspond with each speaker channel and polarity and also which colors will correspond with the led lighting connections.

In this example we used the following:

GREEN LEFT CHANNEL +
BLUE LEFT CHANNEL -
WHITE RIGHT CHANNEL +
YELLOW RIGHT CHANNEL -
RED LED LIGHTING +
BLACK LED LIGHTING -

Choose a wire color to correspond to each speaker (Left or Right) and each polarity (+ / -).
Keep the colors consistent throughout the wiring.

Speaker Placement:

Try to evenly alternate between left and right channel speakers in your placement around your space for an even distribution of sound.

Connect the wires used for the speakers to the amplifier accordingly.

Subwoofer Wiring:

The subwoofer has 4 wires for Right CH +/- and Left CH +/-.
Connect the speaker wires to the subwoofer accordingly.
Note: The subwoofer does NOT have an LED lighting connection.

LED Lighting Wiring Instructions

Selecting Wire Colors for LED Lighting:

Select 2 wire colors for the LED + and LED -.
Maintain consistent wiring throughout the system.

Connecting LED Lighting wires directly to the transformer.