



EUPHORIA™



EX69NCX | 800 WATTS 6X9" NEODYMIUM SERIES 2-WAY LOUDSPEAKER

FEATURES

- 6x9" 2-Way Loudspeaker
- 1.5" (38.5 mm) Midrange Voice Coil
- 10 Neodymium Ring Magnet Assembly
- IP52 Rated Weather Resistant Paper Cone with Cloth Surround
- Die-Cast Aluminum Basket with Radial Venting
- Wide Dispersion 1.25" (28mm) Aluminum Dome Tweeter

SPECIFICATIONS




- Power Handling : 400 Watts
- Dynamic Wattage: 800 Watts
- Frequency Response: 65Hz - 19KHz
- Sensitivity (1w/1m): 96.5 dB
- Impedance: 4Ω

DIMENSIONS

- Mounting Depth: 3.31" / 84.10mm
- Cutout Diameter: 5.81"x 8.56" / 147.57mm x 217.42 mm

THIELE-SMALL PARAMETERS

- | | |
|--------------------------------------|-----------|
| ▪ Resonant Frequency (fs) | 92.1Hz |
| ▪ D.C. Voice coil resistance (RE) | 3.2Ω |
| ▪ Mechanical Quality Factor (Qms) | 5.78 |
| ▪ Electrical Quality Factor (Qes) | 0.33 |
| ▪ Total Quality factor (Qts) | 0.31 |
| ▪ Equivalent Air Volume to Cms (Vas) | 12.2 |
| ▪ Mechanical Compliance (Cms) | 0.18 mm/N |
| ▪ Efficiency (1W/1M) | 96.5 dB |

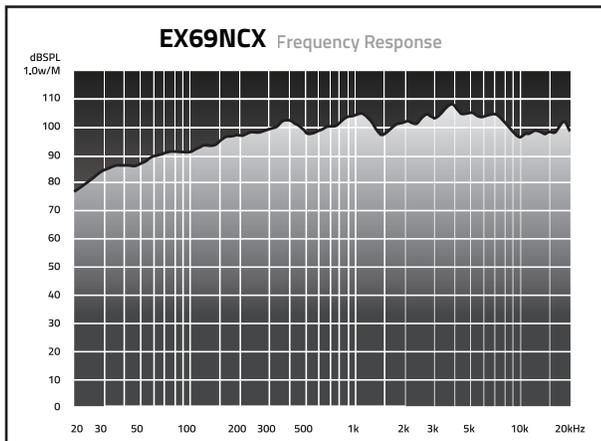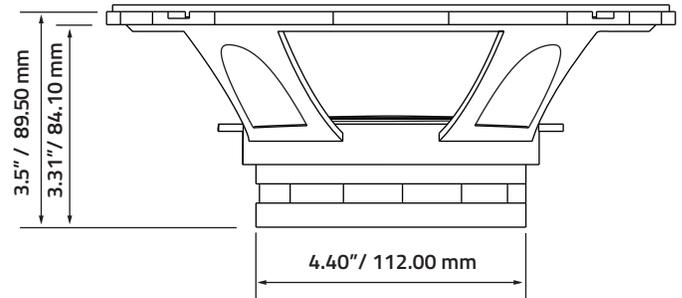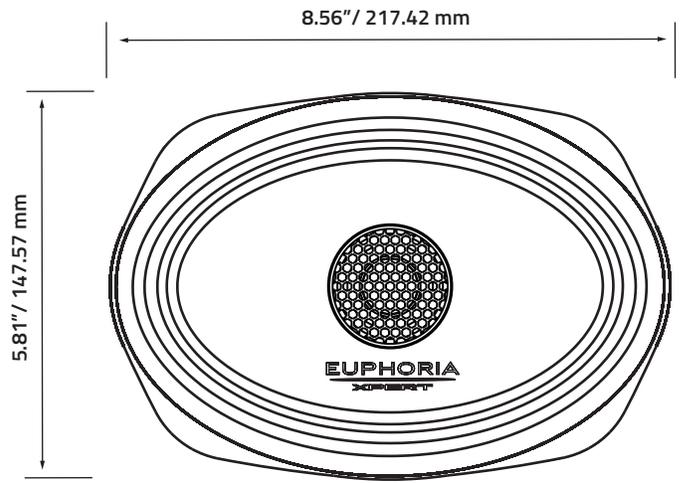

DB Drive, Euphoria and Xpert
are Registered Trademarks of DB Research L.L.P.
Designed and Engineered in the U.S.A
www.euphoriacaraudio.com