

KPT-884-SW

LOW PROFILE SUBWOOFER FOR RESTRICTED AREAS IN MEDIUM TO LARGE CINEMAS



Klipsch

KLIPSCH PROFESSIONAL | CINEMA | DATA SHEET




PRODUCT OVERVIEW

The low-profile Klipsch KPT-884 highoutput cinema subwoofer uses an advanced low-frequency 4-inch voice coil driver design mounted in a bass reflex enclosure to shake things up and deliver deep, driving bass.

Less than 23 inches in depth, this system utilizes a single 18-inch driver that gains its high efficiency through the use of large, geometrically optimized structures and a lightweight cone.

Built from the inside out for performance and durability, the KPT-884 packs a punch that lets audiences hear as well as feel the impact of edge-of-your-seat entertainment. In fact, it is capable of delivering an earth-shaking low frequency of 18Hz.

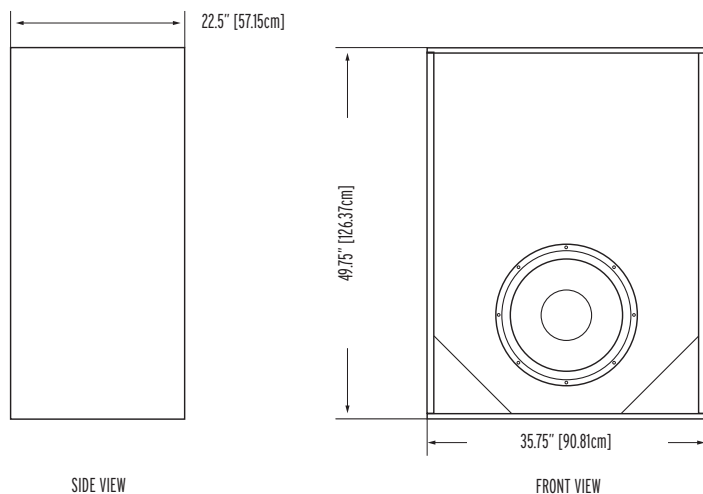

DESIGNED AND MADE IN THE USA USING DOMESTIC AND IMPORTED COMPONENTS

In 1946, Paul W Klipsch, genius & maverick, hand-built his first loudspeaker in a tin shed with the intention of bringing live music into his living room. Remember great sound? We do, too. Today, Klipsch's cinema series speaker enclosures are made in the USA, by proud craftsmen in Hope, Arkansas. Just like PWK intended.

SPECIFICATIONS

FREQUENCY RESPONSE¹ (+/- 3 dB)	27Hz-240Hz 9-10dB @ 18Hz)
POWER HANDLING²	1200 watts (92V)
CALC. MAX. CONT. OUTPUT³	128dB
SENSITIVITY⁴	98dB
NOMINAL IMPEDANCE	8 ohms (7.2 min. @ 23Hz)
TRANSDUCERS	One K-472-E 18" subwoofer
INPUT CONNECTION	Two point barrier strip
HEIGHT	49.75" (126.4cm)
WIDTH	35.75" (90.8cm)
DEPTH	22.5" (57.2cm)
WEIGHT	140lbs (63.5kg)
ITEM NUMBER	097154011316

RECOMMENDED MINIMUM AMPLIFIER POWER

	KPT-884-SW
AMP POWER RATING	2400 watts into 8 ohms

¹ 3M, Half-spaced anechoic
² AES standard, continuous pink noise, 6 dB peaks
³ Calculated at 1M half-spaced at power handling power input
⁴ SPL at 1M, half-spaced anechoic with 2.83V input