

## CA-PLT14RG

---

XM160-2 DUAL AMPLIFIER MOUNTING PLATE DESIGNED AND ENGINEERED FOR 2015+ HARLEY-DAVIDSON® FLTR ROAD GLIDE® MOTORCYCLES

### INSTRUCTION MANUAL

**JVCKENWOOD Corporation**

### Important Notes

©2023 JVCKENWOOD Corporation. All Rights Reserved. KENWOOD® and eXcelon® are registered trademarks of JVCKENWOOD Corporation. Harley-Davidson®, Electra Glide®, Road Glide®, Street Glide®, Ultra Classic®, Tri Glide®, CVO™, Screamin Eagle® and Tour-Pak® are trademarks or registered trademarks of Harley-Davidson, Inc. and/or its affiliates and if used or implied are for reference only. There is no affiliation between Harley-Davidson, Inc. and/or its affiliates and JVCKENWOOD Corporation and/or its affiliates. All other trademarks are the property of their respective owners. Specifications subject to change without notice.

**Take the time to read through this instruction manual.**

**Familiarity with installation and operation procedures will help you obtain the best performance from your new product.**

# XM160-2 Dual Amplifier Mounting Plate Installation Instructions

## Installation procedure

1. Mount 1 or 2 XM160-2's to the mount by pressing to the velcro as displayed in Fig 1.1 and 1.2.

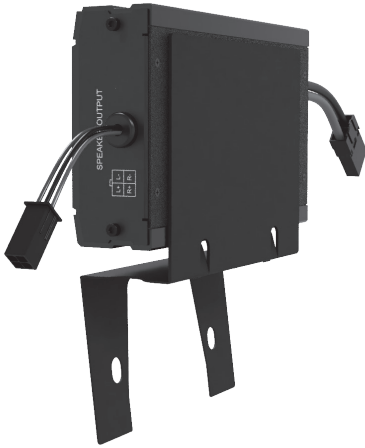


Fig 1.1



Fig 1.2

2. After removing the outer fairing, unscrew the factory screws securing the headlight.

3. Secure the amplifier mounting plate using the top 2 of the 4 bolts that hold the fairing to the bike as displayed by the white arrows in Fig. 1.3.

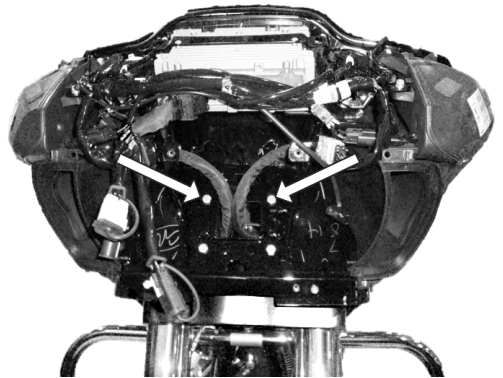


Fig 1.3

For updated information (the latest Instruction Manual, etc.), please visit the following website:

[https://manual.kenwood.com/en\\_contents/search/](https://manual.kenwood.com/en_contents/search/)

