

SP8-AV

LOOKING FOR **CRYSTAL CLEAR** PICTURE AND SOUND?



• **Cable/Sat Protection**

Protects equipment from electrical surges that travel over Cable, Satellite, and Antenna lines.



• **Telephone Line Protection**

Protects equipment from electrical surges that travel over Telephone lines.



• **8 Outlets**

8 filtered and surge protected outlets.



• **Surge Protection**

Exclusive Protect or Disconnect™ circuitry. In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment.



• **Hi Def Ready**

Hi-Def Designed to work with your High Definition system.

SP8-AV

HOME THEATER POWER MANAGEMENT

1 **Improves Picture and Sound Quality**


The SP8-AV's Power Cleaning and Filtration eliminate common symptoms of contaminated power (including loss of detail, pops, hisses, hums and visual artifacts) and allows your AV equipment to perform up to its full capability.

2 **Surge Protection**

Panamax's Exclusive Protect or Disconnect™ circuitry. In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment.



SP8-AV FEATURES

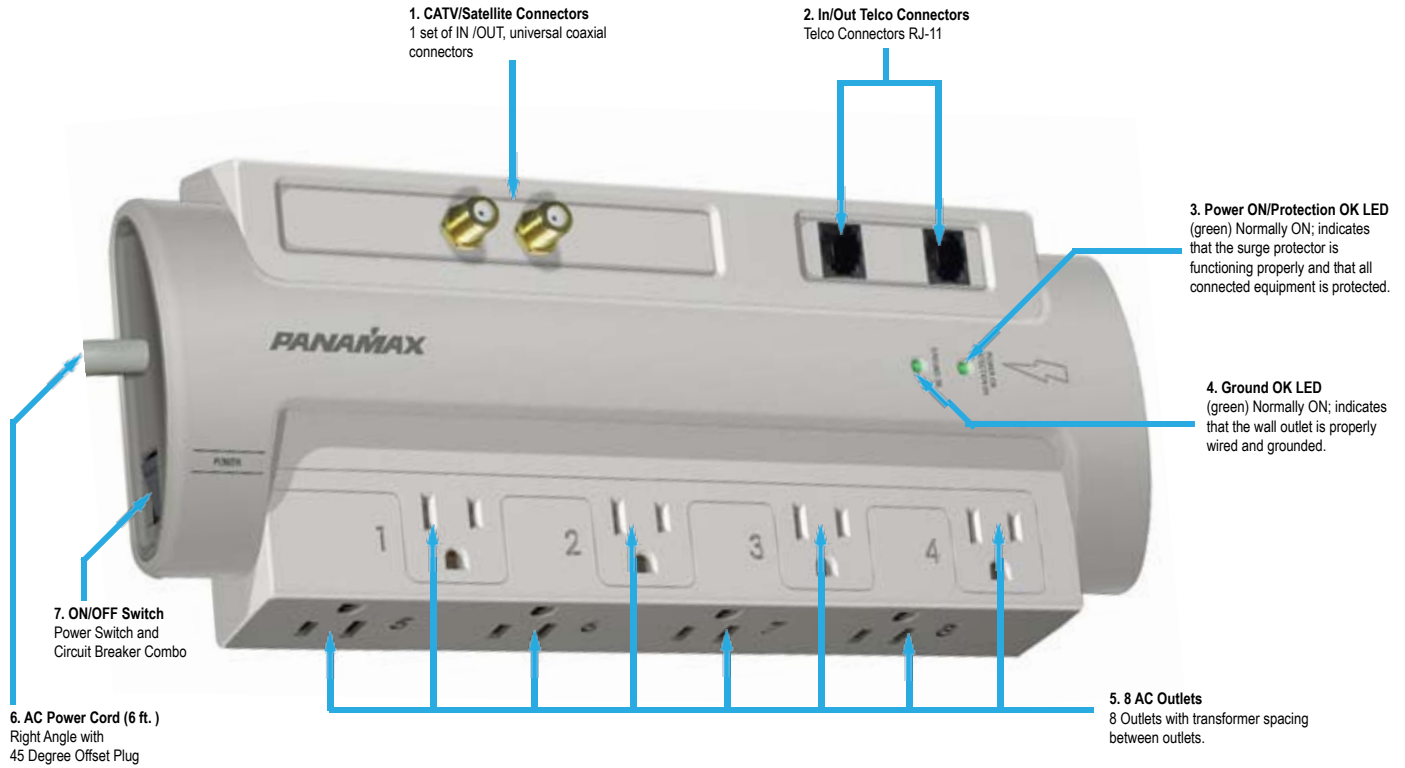

SP8-AV SPECIFICATIONS

<p>General</p> <p>Dimensions:..... 12 in. L x 5 in. W x 1.75 in H (12.5 in. L Including brackets) Weight..... 3.5 lbs.</p> <p>AC Specifications</p> <p>Protect or Disconnect™ Circuitry:..... Yes Thermal Fusing:..... Yes Line Voltage:..... 120VAC, 50/60Hz Initial Clamping Level:..... 200V Peak, 141V RMS Voltage Protection Rating (UL1449 3rd Edition, 3,000A):..... 500V Protection Modes:..... L-N, L-G, N-G Maximum Current Rating:..... 15 A (1800W) EMI/RFI Noise Filtration:..... 45 dB(100 KHz - 1MHz) Response Time:..... < 1ns Single Pulse Energy Dissipation:..... 1125 Joules Peak Impulse Current:..... 60,000 A</p>	<p>Telco Protection</p> <p>Fuseless/Auto-Resettable:.....Yes Clamping Level:.....260V Capacitance:.....30pf (approx.) Suppression Modes:..... Metallic & Longitudinal Wires Protected:..... 1 Line (3,4) Connectors:..... RJ-11</p> <p>Universal Cable / Satellite Protection</p> <p>HD Ready:..... Yes Bi-Directional.....Yes Shielded:.....Yes Clamping Level:..... 75V Frequency Range:..... 0MHz - 2.2 GHz Insertion Loss:..... < 1 dB Connections..... Female "F", Gold Plated</p>
--	---

Design and specifications subject to change without notice due to product improvement.

UPC'S, QUANTITIES, WEIGHTS & MEASUREMENTS FOR ORDERING & SHIPPING

MODEL SP8-AV		UNIT CARTON			MASTER CARTON			
Dimensions	Weight	Dimensions	Weight	UPC	Qty	Dimensions	Weight	UPC
12" x 5" x 1.75" w/brackets 12.5" x 5" x 1.9"	3.5 lbs	13.25" x 9.5" x 2.5"	4 Lbs	0 50616 00814 3	6	17.25" x 8.5" x 14"	20 Lbs	5 0050616 00814 8



1690 Corporate Circle, Petaluma, CA. 94954 800-472-5555 or 707-283-5900 Fax 707-283-5901 www.panamax.com

© 2007 Panamax, Inc. Panamax, MAX, and the Panamax logo are registered US trademarks of Panamax

L579 REV C 02/10