




RPM Hideaway Bluetooth Receiver Box

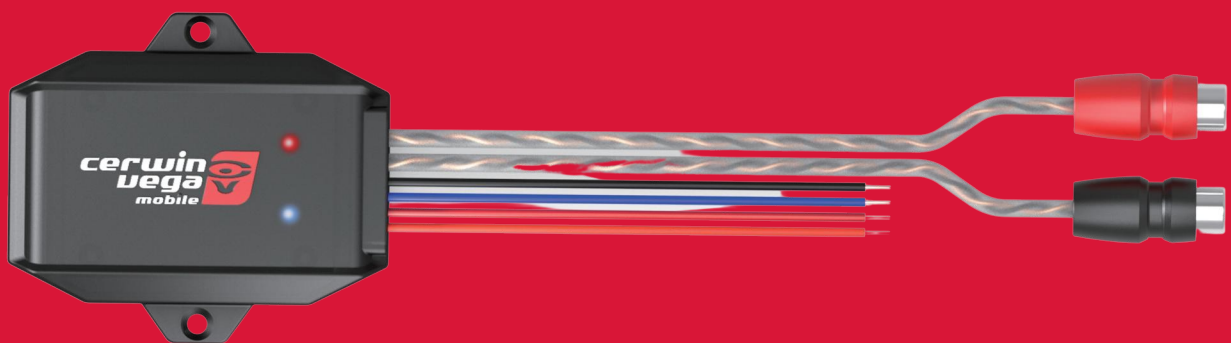

BTR3

MANUAL

Introduction

Upgrade your audio system with the Cerwin-Vega BTR3 RPM Hideaway Bluetooth Receiver, a compact and powerful solution designed for seamless wireless audio streaming in any vehicle or powersports setup. Engineered for convenience and performance, this Bluetooth 5.0 receiver allows you to stream digital music, internet radio, and playlists directly from your smartphone or Bluetooth-enabled device—no head unit required.

The BTR3 hideaway Bluetooth receiver is built for clean, stealth installations. With no external keypad or controls, it can be completely hidden, making it ideal for motorcycles, boats, ATVs, UTVs, golf carts, and custom car audio systems where space and aesthetics matter. Its compact design allows for flexible mounting in tight spaces while maintaining reliable connectivity and high-quality audio performance.

Designed for versatility, the Cerwin-Vega BTR3 can connect to any aftermarket amplifier using standard RCA outputs, making it a perfect addition to both new builds and existing systems. The Bluetooth 5.0 technology ensures stable pairing, fast connectivity, and improved signal strength, allowing multiple devices to connect quickly and switch seamlessly between users.

Installation is simple and efficient with direct-to-battery fused wiring, ensuring a secure and consistent power source. This hard-wire setup enhances reliability and eliminates the need for additional power accessories, making it a go-to solution for professional installers and DIY enthusiasts alike.

Whether you're cruising on the road, riding trails, or enjoying time on the water, the BTR3 delivers clean, wireless audio performance without clutter or complexity.


The BTR3 is an easy to operate Bluetooth Receiver.

- Designed to hide way set up.
- Complete Wireless Connection- Bluetooth 5.0
- Can connect to any after market amplifier

MOUNTING INSTRUCTIONS:

The BTR3 has no controls that need to be adjusted after installation, So it may be mounted in a hidden or inaccessible location. The light weight makes it easy to install with double stick tape or with screw using the side holes. It may be helpful to install in a place where viewing the LED indicator light is possible.

Wire/Connection	Instruction
RED WIRE	Connect to +12V for Power
BLUE WIRE	Connect to Amplifier Remote Wire to turn on the amp
BLACK WIRE	Connect to ground (0V / chassis) for the ground connection
MAIN OUTPUT	Connect to the input of an amplifier

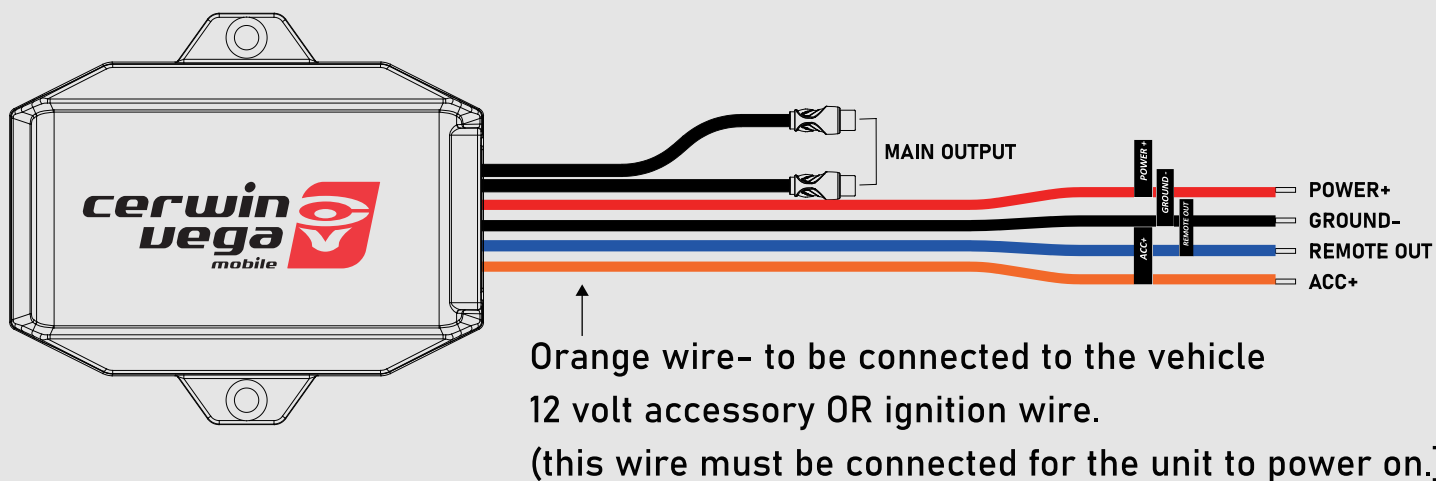

BLUETOOTH PAIRING INSTRUCTIONS:

STEP 1: Connect the BTR3 as explained in this manual, The blue light will light when power is applied.

STEP 2: If not already paired with another learned device, the BTR3 will automatically enter pairing mode, which is indicated by the backlight flashing BLUE.

STEP 3: From your phone's Bluetooth pairing menu find the "Cerwin Vega" and connect to it.

STEP 4: When the blue light is lit constantly, The BTR3 is paired to the BT device. The BTR3 will automatically default to this device if in range whenever the BTR3 is powered on.

STEP 5: (Amplifier Remote Power Control)


- When the BT device is paired and playing music:
The RED light will illuminate, indicating the BTR3 is supplying +12V to the amplifier's remote turn-on wire.
- When the BT device is paused for more than 10–15 seconds:
The +12V signal to the remote out wire is cut off, causing the amplifier to power down. The RED light will also turn off.
- Resuming playback:
Pressing PLAY again will reactivate the +12V signal to the remote out wire, turning the amplifier back on, and the RED light will illuminate once more.

CERWIN VEGA (a division of CV & DA Holdings, Inc.) warrants this product to be free from defects in material and workmanship for a period of one (1) year from the original date of purchase provided, it was purchased from an authorized Cerwin Vega, retailer within the United States.

THIS WARRANTY IS NOT TRANSFERABLE AND APPLIES ONLY TO THE ORIGINAL PURCHASE OF THIS PRODUCT IN ITS ORIGINAL INSTALLATION. The original purchaser must reside in the United States and be able to provide proof of purchase and installation with the sales from the authorized Cerwin Vega retailer and completion of online registration that sold and installed the product.

Should a manufacturing defect occur during above said warranty period, Cerwin Vega will replace or repair the defective product with a product of the same or equivalent value and performance.

Damage or failure caused by any of the following is not covered under this warranty policy: burnt voice coils, negligence, improper use, abuse, product modification, unauthorized repair attempts, accident, acts of God, misrepresentations by Cerwin Vega retailers, and improper/inadequate packaging during return shipping.

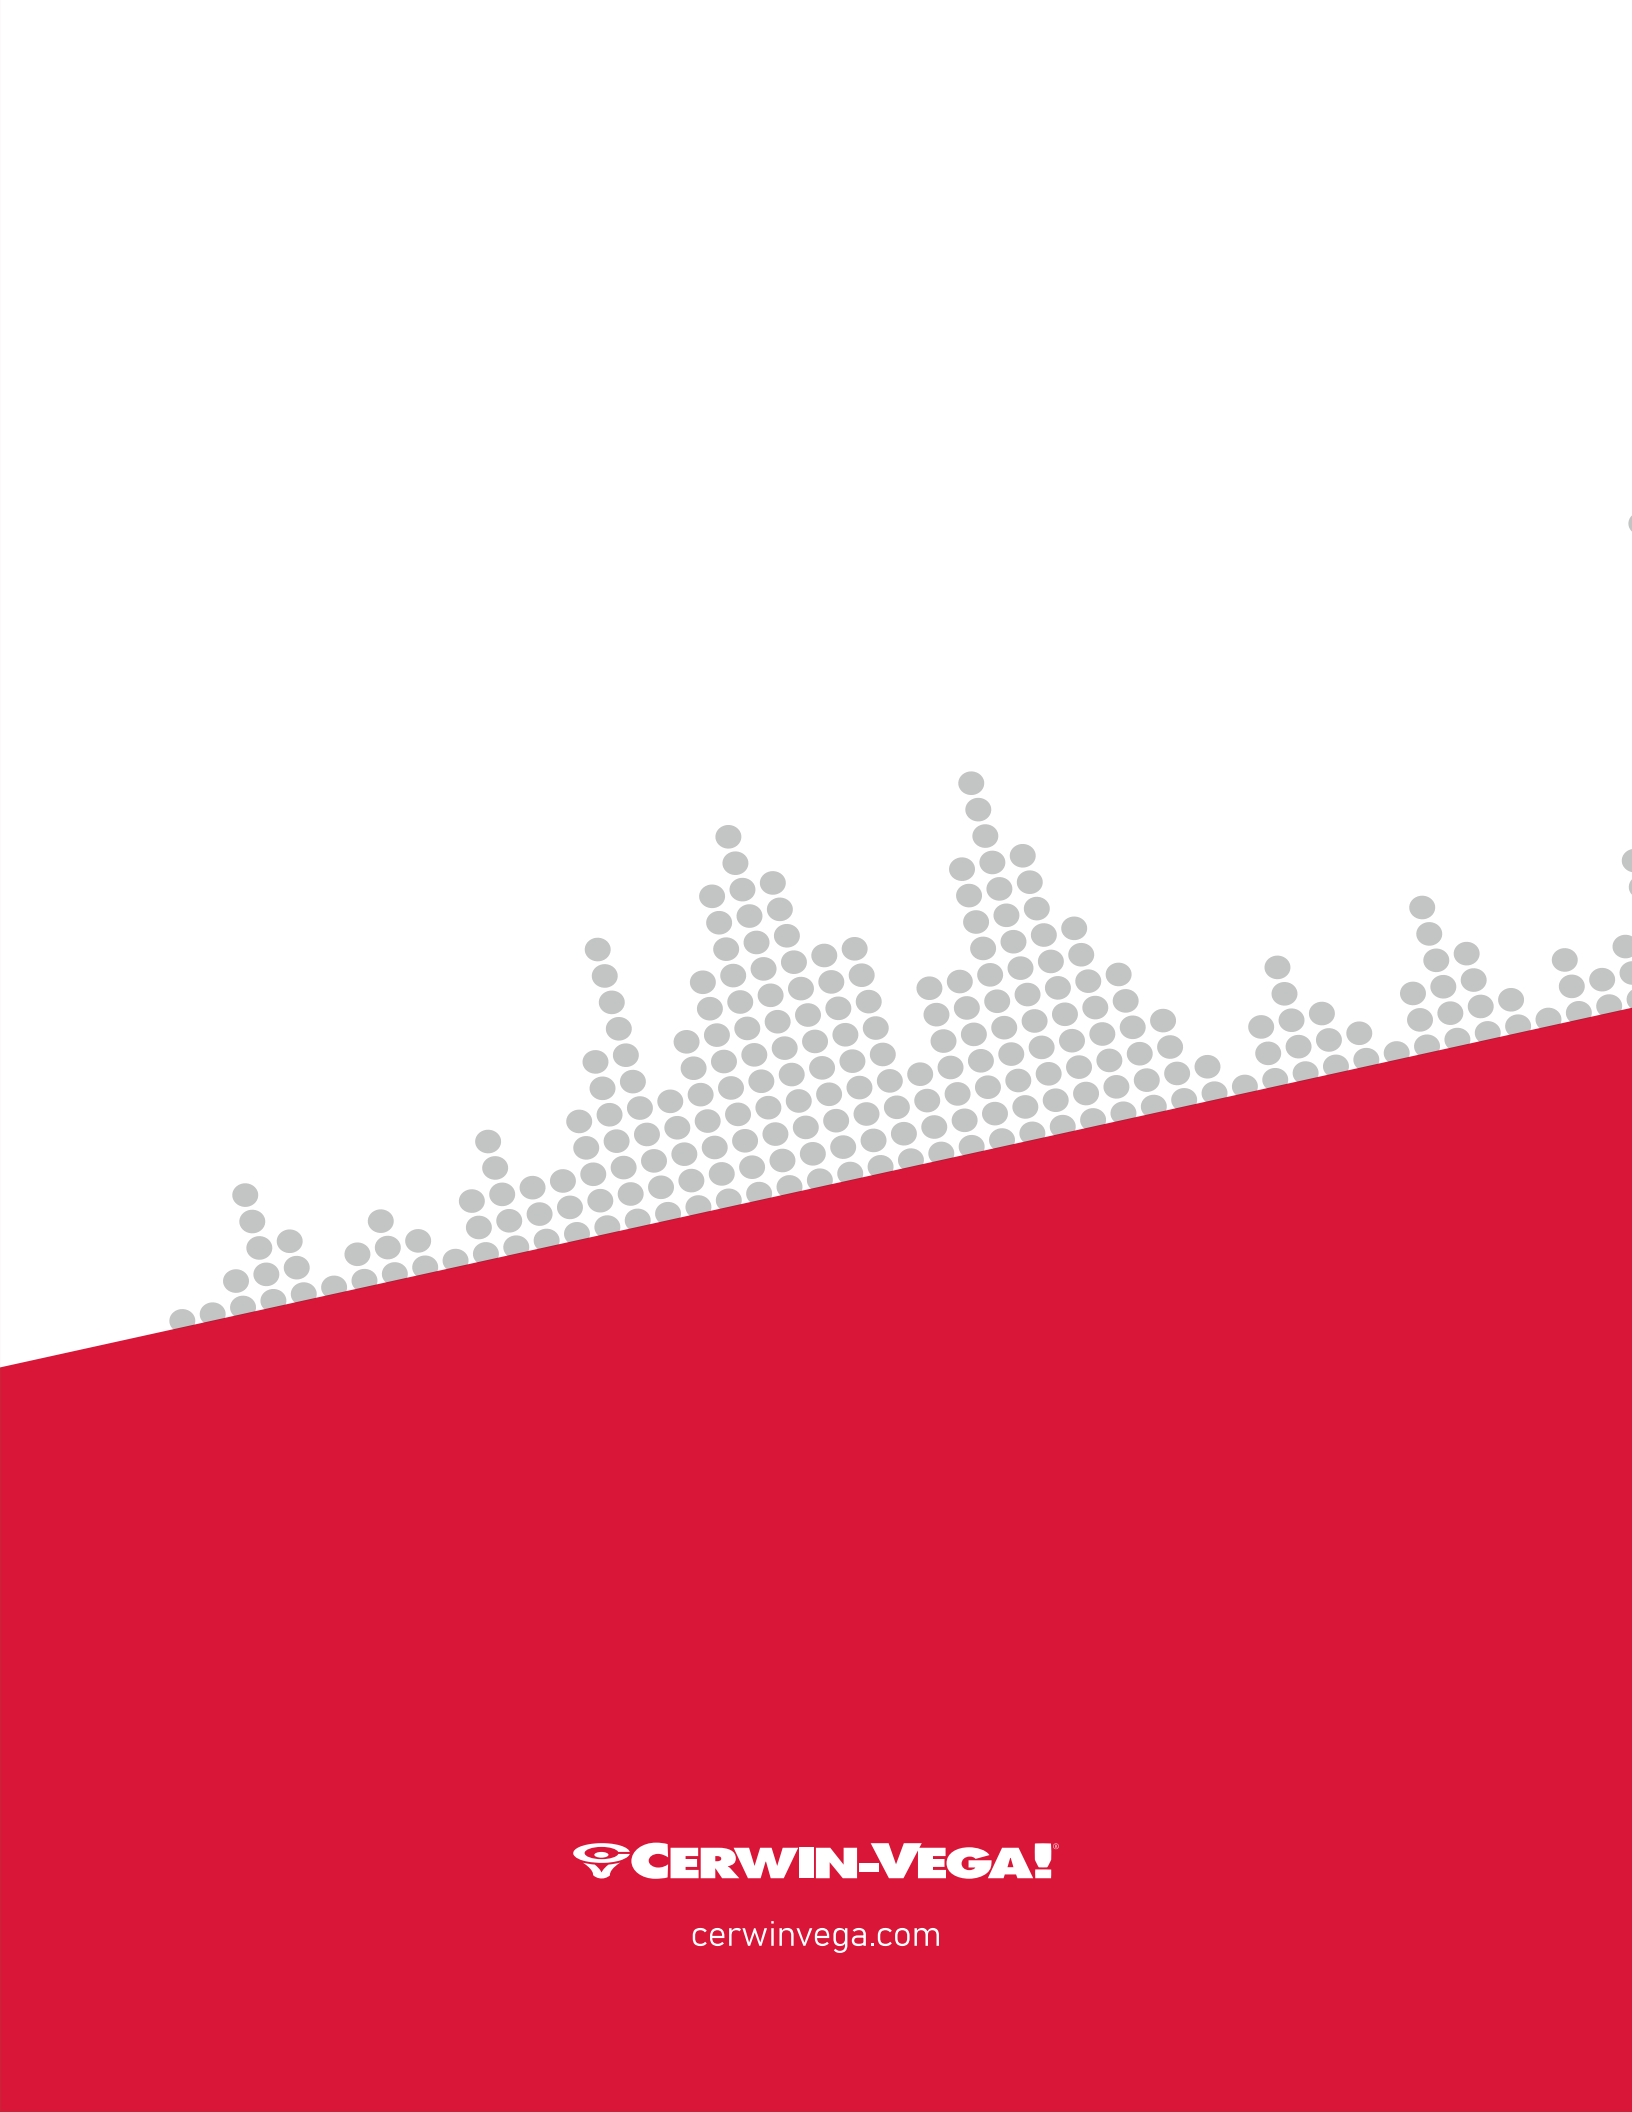

cerwinvega.com