

ACCESS 130 AS

Woofer (5")




- Cone DFS®
- ABS basket

SPECIFICATIONS

Nominal power	50W	
Maximum power	100W	
Sensitivity (2,83V/1m)	90dB	
Cone	Glass fiber	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	3.6 Ohms	
VC diameter	25mm	1"
VC height	10mm	0 ^{3/8} "
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	-	
Xmax	± 2.5mm	0 ^{1/8} "
Magnet d x h	85mm x 15mm	3 ^{1/3} x 0 ^{9/16} "
Magnet weight	380g	0.76 lbs
Flux density	1T	
Gap height	5mm	0 ^{3/16} "
Net weight	0.85kg	1.70 lbs


FREQUENCY RESPONSE/IMPEDANCE

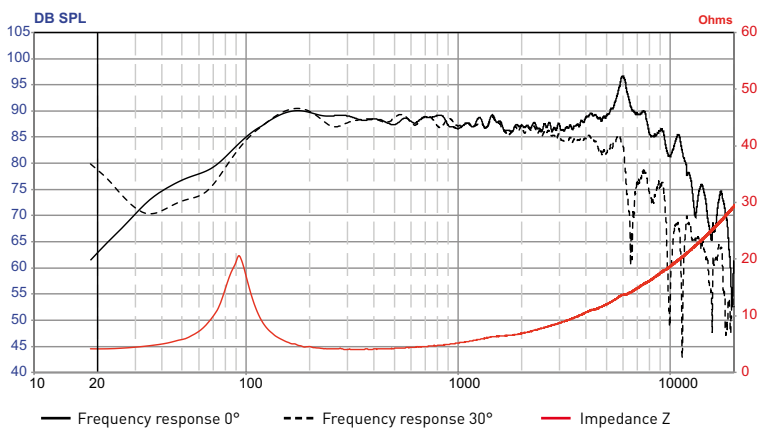

PARAMETERS

Fs	92.91Hz
Vas	3.26 liters
Qts	0.711
Qes	0.84
Qms	4.64
Re	3.67 Ohms
Sd	86.59cm ²
Cas	2,03E-08 m5/N
Mas	126.3kg/m ⁴
Ras	15890,49 Ohms.ac
Cms	310µm/N
Mms	9.47g
Rms	1.191kg/s
Ces	392.08mF
Les	7.48mH
Res	20.27 Ohms
BI	4.91N/A
SPL	86.78 dB/W/m

MECHANICAL DRAWING

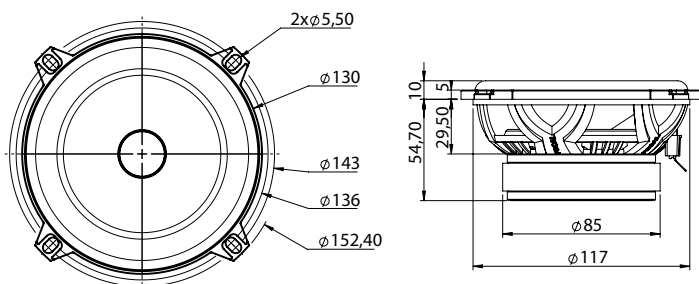

Performance
CREATE YOUR SOUND

FOCAL
THE SPIRIT OF SOUND